


### **Specifications**

- Heavy brass construction for durability and reliability
- Pressure balancing ceramic cartridge ensures anti-scald operation with lifelong trouble-free service
- Single lever handle operation allows both volume and temperature control
- Max-temperature limit stop for added safety
- Integral stop valves for easy maintenance
- Includes check valves to prevent any crossflow
- Inlet and Outlet ports – 1/2" CxC soldering & 1/2" NPT thread
- Adjustable installation depth from 1-15/16" (50mm) to 2-15/16" (75mm)
- Seal cap is provided for a tub only or shower only installation.
- Mud guard is provided to help protect valve from dust and debris during installation
- Bubble level is attached to mud guard for an easy and level installation
- A wide selection of complimentary trims are sold separately
- Deep wall extension kit F-EXTVC-BL is available and sold separately

### **fluid Pressure Balancing Model: F1001B**

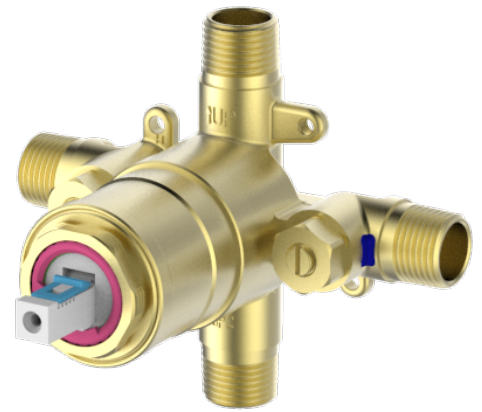

### **Flow Rate**

- 5.5 gpm @ 60 psig

### **Finish**

- Brass

### **Codes and Standards**

- ANSI/ASME A112.18.1
- CSA B125.1
- IAPMO / cUPC Listed

### **Warranty**

- Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.
- 2 Year Limited Warranty on all industrial, commercial and business applications.

