

### Features

- Compact one-piece toilet with integrated cleansing.
- Elongated bowl offers added room and comfort.
- 1.28 gallons per flush (gpf).
- Advanced cleansing functionality with self-cleaning wand, precision air dryer, and deodorizing filter all in one.
- Personalized settings for two users for heated seat, dryer, and water temperature.
- Intuitive touchscreen remote is hand-held or wall-mounted.
- Motion-activated, hands-free opening/closing cover.
- LED night-light illuminates the bowl for added convenience in dark spaces.
- Self-cleaning wand automatically performs rinse cycle after each use.
- Carbon filter neutralizes odors for up to a year.

### Technology

- Power Lite® flushing technology offers a powerful 1.28-gallon flush that is controlled from either the touchscreen or integrated remote.

### Installation

- Standard 12-inch rough-in.
- Minimum static pressure of 20 psi required.
- Dedicated electrical GFCI circuit required (120V, 15A, 60Hz, 1800W).

### Water Conservation & Rebates

- WaterSense® toilets meet strict EPA flushing guidelines, including using at least 20 percent less water than 1.6-gallon toilets.
- Eligible for consumer rebates in some municipalities.
- This product meets water savings requirements for California Energy Commission (CEC), CALGreen, and Colorado SB 14-103.

### Components

Additional included component/s: Seat, supply line, power cord, and LCD remote control.



### Codes/Standards

ASME A112.19.2/CSA B45.1  
ASME A112.4.2/CSA B45.16  
DOE - Energy Policy Act 1992  
EPA WaterSense®  
California Energy Commission (CEC)  
UL 1951  
CSA C22.2 No. 14  
CSA C22.2 No. 68

### KOHLER® Intelligent Toilet and C3® Cleansing Seat Three-Year Limited Warranty


See website for detailed warranty information.

### Available Color/Finishes

*Color tiles intended for reference only.*

Color	Code	Description
-------	------	-------------

	0	White
--	---	-------

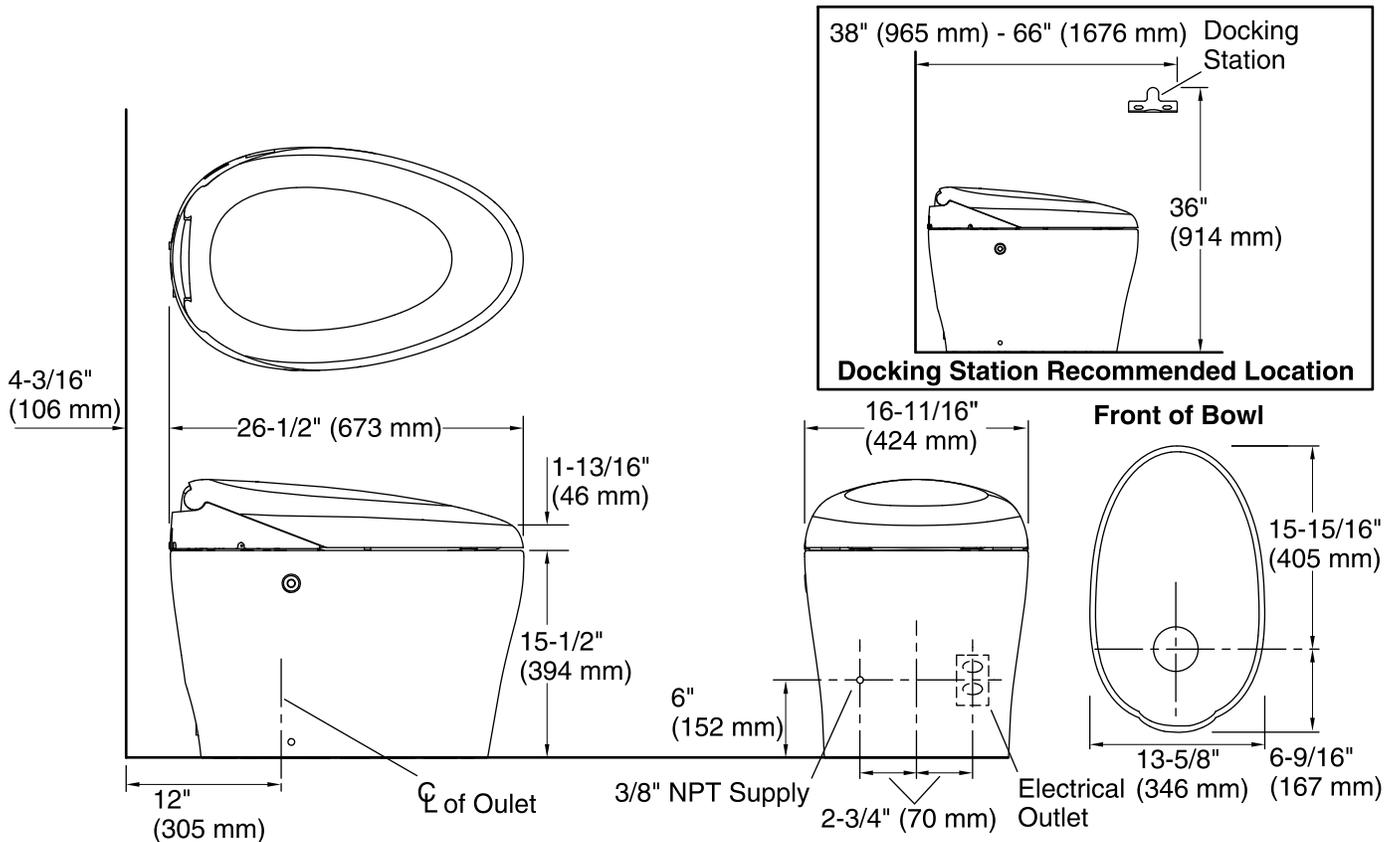

### Required Electrical Service

One dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD).

120 V, 15 A, 60 Hz

### Technical Information

All product dimensions are nominal.

Toilet type:	One-piece, Floor-mount
Bowl shape:	Elongated front
Trap passageway:	2-7/8" (73 mm)
Water Consumption	
Full:	1.28 gpf (4.8 lpf)
Water surface size:	12" x 9-1/2" (305 mm x 241 mm)
Rim to water surface:	4-7/8" (124 mm)
Rough-in:	12
Seat-mounting holes:	5-1/2" (140 mm)

### Fixture Supply Requirements

Min static pressure: 20 psi (137.9 kPa)

### Notes

Install this product according to the installation instructions.

This product is designed for installation with the electrical and water supplies located through either the wall or the floor.

If the rough-in distance is less than 12" (305 mm) the seat may strike the wall when it is opened. Confirm the rough-in is 12" (305 mm) before installing the toilet.