

### Features

- Compact, streamlined one-piece toilet with integrated cleansing.
- Elongated bowl offers added room and comfort.
- Comfort Height® feature offers chair-height seating that makes sitting down and standing up easier for most adults.
- Motion-activated, hands-free opening/closing of seat and cover.
- Dual flush offers a choice of 0.6 or 1.28 gallons per flush (gpf).
- Advanced cleansing functionality with self-cleaning wand, precision air dryer, and deodorizing filter all in one.
- Adjustable heated seat and foot warmer.
- Ambient lighting with eight colors and three programming options.
- Built-in speakers play preprogrammed custom Numi song, FM radio, or your personalized music from a portable device with BLUETOOTH®\* technology or auxiliary cable, or simply load a playlist or welcome message to the SD card.
- Power-Save mode monitors usage and adjusts heated seat settings to save energy.
- 2-7/8-inch trapway.
- Emergency flush supports up to 100 flushes during power outage.
- \*The BLUETOOTH® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Kohler Co. is under license. Other trademarks and trade names are those of their respective owners.

### Technology

- Touch-screen remote control with magnetic wall-mount docking/charging station.
- User presets for up to six people to recall individual saved preferences.
- Remote is adjustable to 12 different languages.
- Remote includes lithium polymer rechargeable battery.
- Preferred remote for residential settings.
- Dual-flush technology allows you to choose between a full- or partial-flush.

### Installation

- Standard 12-inch rough-in.
- Requires a supply stop with 1/2-inch OD compression male outlet thread.
- Requires a 120 V, 15 A minimum, 60 Hz receptacle protected by a GFCI or RCD.
- Supply line included.

### Water Conservation & Rebates

- WaterSense® toilets meet strict EPA flushing guidelines, including using at least 20 percent less water than 1.6-gallon toilets.



### Codes/Standards

ASME A112.19.14  
 ASME A112.4.2/CSA B45.16  
 ASME A112.19.2/CSA B45.1  
 DOE - Energy Policy Act 1992  
 EPA WaterSense®  
 California Energy Commission (CEC)  
 UL 1951  
 CSA C22.2 No. 14  
 CSA C22.2 No. 68

### KOHLER® Intelligent Toilet and C3® Cleansing Seat Three-Year Limited Warranty


See website for detailed warranty information.

\*The BLUETOOTH® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Kohler Co. is under license. Other trademarks and trade names are those of their respective owners.

### Available Color/Finishes

*Color tiles intended for reference only.*

Color	Code	Description
	0	White
	HB1	Honed Black

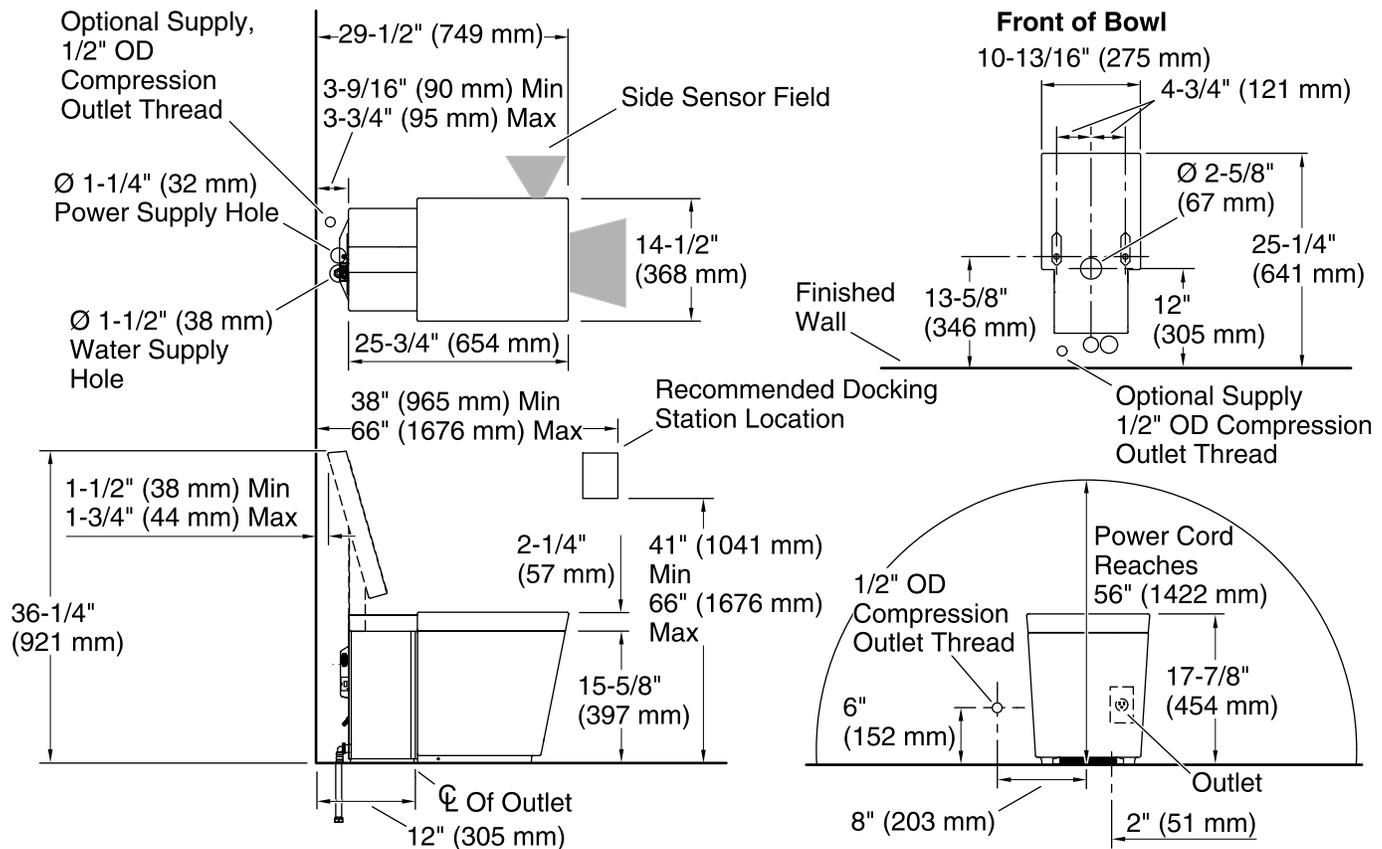

### Required Electrical Service

One dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD).

120 V, 15 A, 60 Hz

### Technical Information

All product dimensions are nominal.

Toilet type:	One-piece
Bowl shape:	Elongated front
Trap passageway:	2-7/8" (73 mm)
Water Consumption	
Full:	1.28 gpf (4.8 lpf)
Reduced:	0.6 gpf (2.3 lpf)
Water surface size:	10" x 8-1/4" (254 mm x 210 mm)
Rim to water surface:	5-1/2" (140 mm)
Rough-in:	12

### Fixture Supply Requirements

Min static pressure:	30 psi (206.8 kPa)
Max static pressure:	80 psi (551.6 kPa)
Bluetooth® range:	33 ft (0.8 m)

### Notes

Install this product according to the installation instructions.

**IMPORTANT!** Use the supply hoses provided with the fixture. Do not reuse the previously installed hoses.

Installation of a water hammer arrestor is recommended.

Install the docking station cord, when premium remote control is included, before installing the finished wall.

The supplied water inlet hose requires a supply stop with a 1/2" OD compression male outlet thread.

If local codes require the toilet be bolted to the flange, order kit 1171368 for required hardware and instructions.

Can be installed with water and electrical supplies attached to the back wall or through the floor. See roughing-in illustration for details.

Adjust the through-the-floor installation as required to meet all local codes.