



Rêve®

Comfort Height® Dual Flush Toilet

K-3797

Features

- One-piece toilets integrate the tank and bowl into a seamless, easy-to-clean design.
- Compact elongated bowl offers added comfort while occupying the same space as a round-front bowl.
- Two-button flush offers a choice of .8 or 1.6 gallons per flush (gpf).
- Skirted trapway facilitates easy cleaning and enhances design.
- Includes Rêve seat with Quiet-Close™ functionality.
- Coordinates with other products in the Rêve collection.

Technology

- Dual-flush technology allows you to choose between a full- or partial-flush.

Installation

- 12-inch rough-in.
- Supply line not included.

Water Conservation & Rebates

- WaterSense® toilets meet strict EPA flushing guidelines, including using at least 20 percent less water than 1.6-gallon toilets.
- Eligible for consumer rebates in some municipalities.
- This product meets water savings requirements for CALGreen and Colorado SB 14-103.

Recommended Accessories

K-9384 Dual-flush Actuator
1023457 Wax Ring/Hardware Kit
1265114 Connector Hose

Components

Additional included component/s: Tank cover, Dual flush push buttons, Installation kit, Installation template, Tank accessory pack, and Toilet seat.



Codes/Standards




ASME A112.19.2/CSA B45.1
ASME A112.19.14
DOE - Energy Policy Act 1992
EPA WaterSense®


KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.

Color	Code	Description
	0	White
	96	Biscuit
	47	Almond

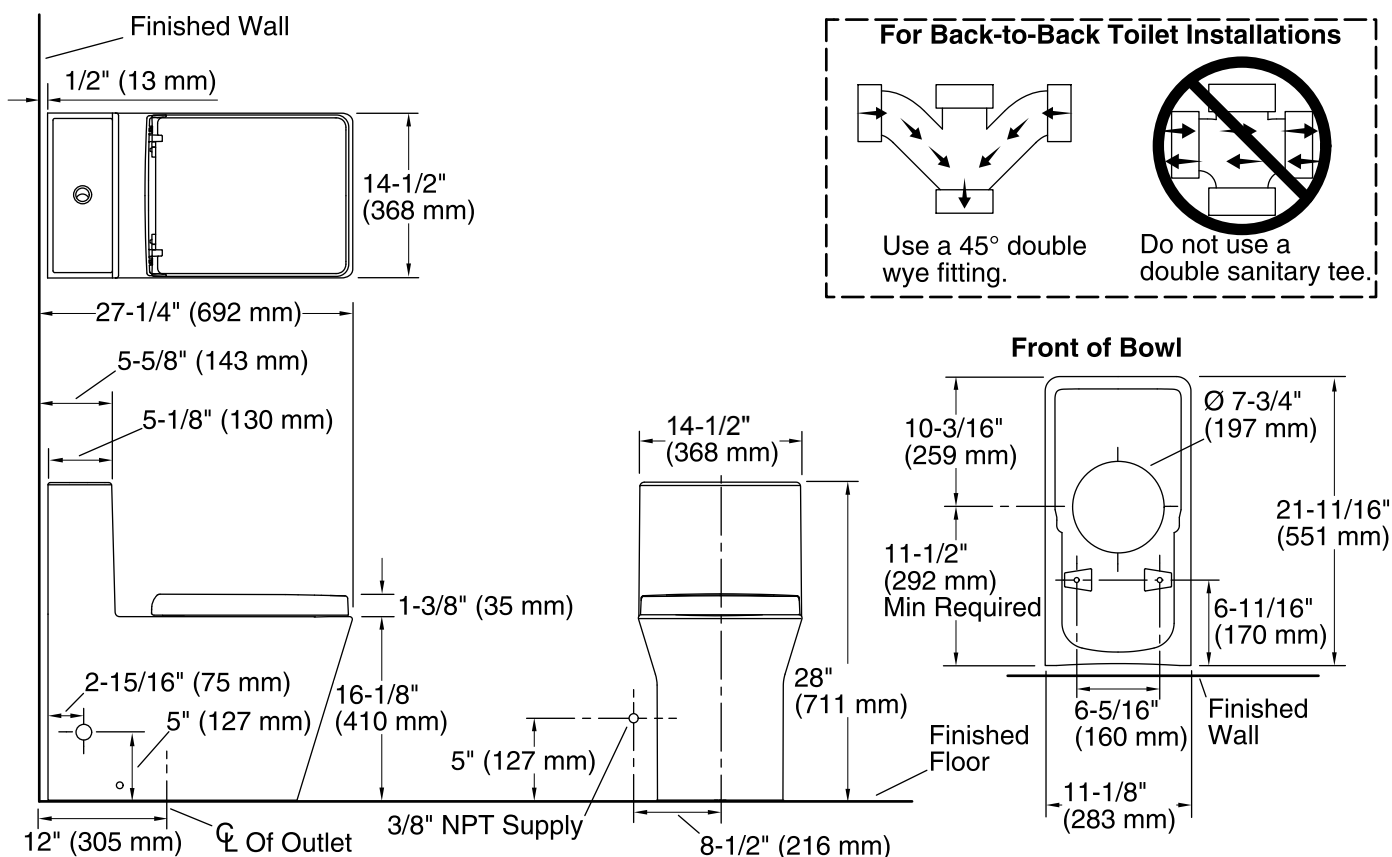

Technical Information

All product dimensions are nominal.

Toilet type: One-piece, Floor-mount

Waste Outlet: Floor

Bowl shape: Elongated front

Trap passageway: 2-1/8" (54 mm)

Water Consumption

Full: 1.6 gpf (6 lpf)

Reduced: 0.8 gpf (3 lpf)

Water surface size: 4-1/8" x 5-1/2" (105 mm x 140 mm)

Rough-in: 12"

Seat-mounting holes: 7-7/8" (200 mm)

Notes

Install this product according to the installation instructions.

For back-to-back toilet installations: Use only a 45° double wye fitting.