



Features _____

- Floor mount, rear outlet
- ADA compliant (with lever only)
- 1.6 gpf / 6.0 lpf water consumption
- Elongated front
- SmartHeight™ (16-1/2" high bowl) chair height
- High performance, pressure-assist Flushmate[™] flushing technology
- Trip levers
- Model 45 left hand, chrome-plated metal
- Model 49 right hand, chrome-plated metal
- Model 47 push button actuator, chrome-plated plastic
- 1-7/8" glazed trapway
- The Mansfield® limited lifetime warranty
- Available in White and Standard Colors: Biscuit, Bone







Model 122 Tank Shown with push button actuator

Model 123RH Tank Shown with Model 49 right hand trip lever



Model 151-123 Toilet seat not included

Components _____

Model #	Description	Codes/Standards
151-123	Elongated front, floor mount, rear outlet, two-piece pressure-assist toilet. Less toilet seat and supply. Specify color.	
151	Elongated front, floor mount, rear outlet, toilet bowl only. Less toilet seat. Specify color.	
123	Pressure-assist tank and cover only with left hand chrome-plated, metal trip lever. Less supply. Specify color.	ADA ADA
123RH	Same as model 123, except with right hand trip lever.	
122	Pressure-assist tank and cover only with chrome-plated metal push button actuator. Less supply. Specify color.	






Specifications

Model #	Description	Codes/Standards
151-123	Elongated front, pressure-assist, floor-mount, rear outlet, two-piece toilet	ADA ADA

Specification	Description	Specification	Description
Material	Vitreous China	Trap Diameter	1-7/8"
Water Pressure Range	35 to 80 PSI	Trap Seal	2-3/4"
Flush System	Pressure-assist Flushing Technology	Rough-in	Rear Outlet
Water Usage	1.6 gpf / 6.0 lpf	Shipping Weight	Model 151 - 61 lbs.
Water Surface Area	10-1/2" X 12-1/4"		Model 122/123/123RH – 47 lbs.
MaP Rating	1000 grams	Warranty	Vitreous China - Limited Lifetime Tank Trim - Five Year Limited

Technical Information

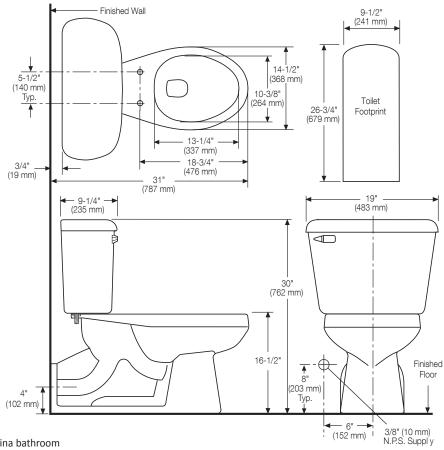

See our complete line of acrylic and vitreous china bathroom fixtures, plastic tank trim and plumbing products.

These dimensions are nominal and subject to change without notice.

Fixture performance and specifications meet or exceed ASME A112.19.2-2008/CSA B45.1-08 standards, and other state and local codes.

