

## Glaston™ Two-Piece Toilet - 1.28 GPF

### FEATURES

- High-efficiency TORNADO FLUSH® system - 1.28 GPF (4.8 LPF)
- CEFIONTECT® ceramic glaze prevents debris and mold from sticking to ceramic surfaces
- Completely skirted design for a sleek and understated look that's easier to clean
- Universal Height
- Elongated front bowl, seat sold separately
- 12" Rough-in
- Chrome plated trip lever

### MODELS

- **CST472CEFG (#01)**  
With CEFIONTECT ceramic glaze without seat
- **CST472CEFRG (#01)**  
Same as CST472CEFG with right hand trip lever

### COMPONENTS

- **CT472CUFG**  
Elongated bowl with CEFIONTECT
- **ST472EA**  
Tank and cover only
- **ST472ER**  
Tank and cover only with right-hand trip lever

### OPTIONAL COMPONENTS

- **TSU10W.10**  
10" Unifit Rough-in
- **TSU10W.14**  
14" Unifit Rough-in
- **THU886(#01, #BN, #MBL, #PN)-A**  
Left Hand Trip Lever (Cotton, Brushed Nickel, Matte Black, Polished Nickel)

### COLORS/FINISHES

- #01 Cotton



TORNADO FLUSH



CEFIONTECT



UNIVERSAL HEIGHT



SKIRTED DESIGN

### PRODUCT SPECIFICATION

The two-piece high-efficiency TORNADO FLUSH system toilet shall be 1.28 GPF (4.8 LPF). Toilet shall have CEFIONTECT ceramic glaze and be at Universal Height. Toilet shall have high-profile tank, elongated front bowl and Chrome trip lever. Toilet shall be TOTO Model CST472CEF(R)G#\_\_\_.

### CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1
- Certifications: IAPMO(cUPC®), EPA WaterSense, State of Massachusetts, and others
- Code Compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative Compliance: California AB715, California Green Building Code, City of Los Angeles Water Efficiency Ordinance, and others
- ADA compliant (when installed with trip lever located on the approach side)
- Complies with CA Prop 65 warning requirements




SPECIFICATIONS

|                     |                                                                |
|---------------------|----------------------------------------------------------------|
| Water Use           | 1.28 GPF (4.8 LPF)                                             |
| Flush System        | TORNADO FLUSH®                                                 |
| Min. Water Pressure | 8 psi (Flowing)                                                |
| Water Surface       | 9" x 6-1/4"                                                    |
| Trap Diameter       | 2-1/8"                                                         |
| Rough-in            | 12" (10" & 14" Optional)                                       |
| Trap Seal           | 2-1/8"                                                         |
| Warranty            | One Year Limited Warranty                                      |
| Material            | Vitreous China                                                 |
| Shipping Weight     | <b>CT472CUFG</b><br>75 lbs                                     |
|                     | <b>ST472EA and ST472ER</b><br>31 lbs                           |
| Shipping Dimensions | <b>CT472CUFG</b><br>29-7/16" L x 15-1/16" W x 18-3/8" H        |
|                     | <b>ST472EA and ST472ER</b><br>18-3/4" L x 8-1/2" W x 16-1/4" H |

INSTALLATION NOTES

Back-to-Back Toilet Installations:  
TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

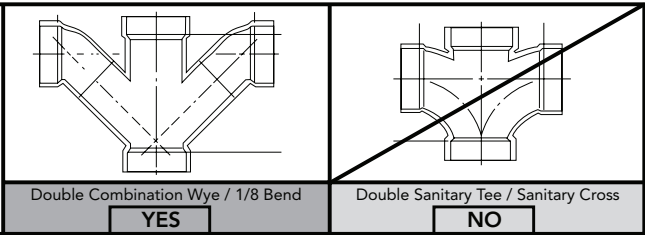

To maintain adequate wall gap between the back of the tank and wall, mount the floor flange at a nominal 12" rough-in distance.

DIMENSIONS

