

Ultramax® Low Profile One-Piece Toilet - 1.28 GPF

FEATURES

- High-efficiency TORNADO FLUSH® system - 1.28 GPF (4.8 LPF)
- CEFIONTECT® ceramic glaze prevents debris and mold from sticking to ceramic surfaces
- Decorative one-piece design with low-profile tank
- UNIVERSAL HEIGHT
- Elongated front bowl with SoftClose® seat (SS114)
- 12" Rough-in
- Chrome plated trip lever

MODELS

- **MS618114CEFG (#01)**
With CEFIONTECT ceramic glaze & includes SS114 SoftClose seat

OPTIONAL COMPONENTS

- **THU808(#01, #BN, #PN, #PB, #RB, #MBL)-A**
Trip Lever (Cotton, Sedona Beige, Ebony, Brushed Nickel, Polished Nickel, Polished Brass, Oil Rubbed Bronze, Matte Black)

COLORS/FINISHES

- #01 Cotton

PRODUCT SPECIFICATION

The one-piece high-efficiency TORNADO FLUSH system toilet shall be 1.28 GPF/4.8 LPF. Toilet shall be 12" rough-in. Toilet shall have optional CEFIONTECT ceramic glaze and be at Universal Height. Toilet shall have elongated front bowl with SoftClose seat and Chrome trip lever. Toilet shall be TOTO Model MS618114CEFG#01.



TORNADO FLUSH



CEFIONTECT



UNIVERSAL HEIGHT

CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1
- Certifications: IAPMO(cUPC®), EPA WaterSense, State of Massachusetts, and others
- Code Compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative Compliance: California AB715, California Green Building Code, City of Los Angeles Water Efficiency Ordinance, and others
- ADA compliant (when installed with trip lever located on the approach side)
- Complies with CA Prop 65 warning requirements



IAPMO/ICC

MS618114CEFG


Ultramax® Low Profile One-Piece Toilet - 1.28 GPF

SPECIFICATIONS

Water Use	1.28 GPF (4.8 LPF)
Flush System	TORNADO FLUSH®
Min. Water Pressure	8 psi (Flowing)
Water Surface	9" x 7"
Trap Diameter	2"
Rough-in	12"
Trap Seal	2-1/8"
Warranty	One Year Limited Warranty
Material	Vitreous China
Shipping Weight	99 lbs
Shipping Dimensions	30" L x 19" W x 29-5/8" H1 x 18-1/2" H2


INSTALLATION NOTES

Back-to-Back Toilet Installations:
TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

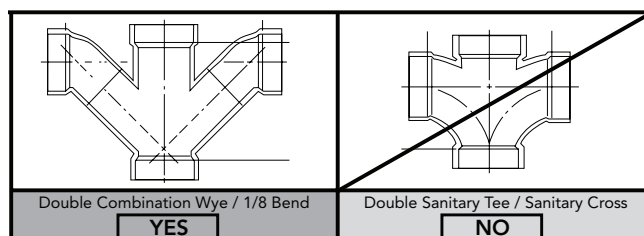

To maintain adequate wall gap between the back of the tank and wall, mount the floor flange at a nominal 12" rough-in distance.

DIMENSIONS

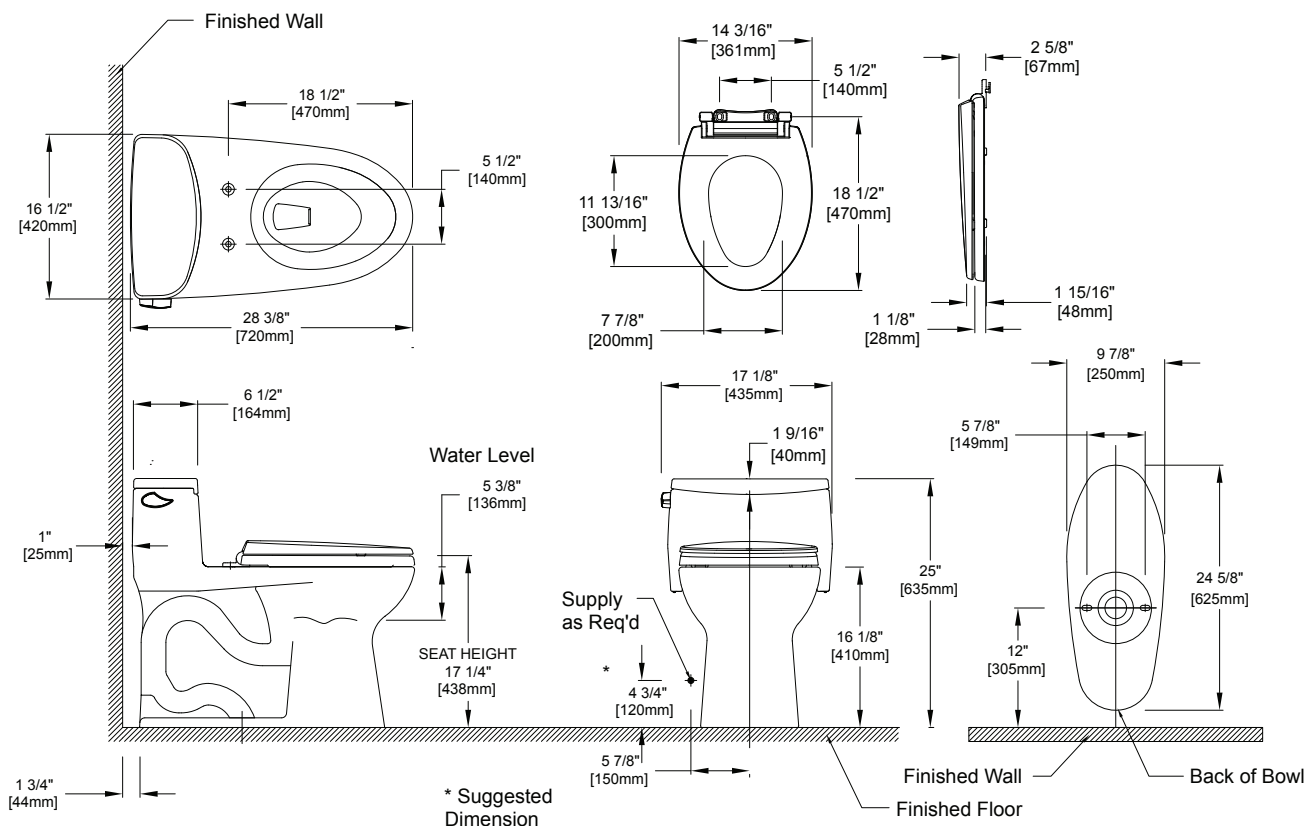

TOTO®

These dimensions and specifications are subject to change without notice