

# TOTO®

# CST474CEF(G)

## Vespin® II Close Coupled High-Efficiency Toilet, 1.28GPF

### FEATURES

- Tornado Flush™ system, low consumption (1.28GPF/4.8LPP)
- Skirted design
- CEFIONTECT® ceramic glaze - prevents debris and mold from sticking to ceramic surfaces, leading to fewer chemicals and less water in cleaning (not avail on Ebony #51)
- Universal Height
- Decorative two-piece design with high-profile tank
- Elongated front bowl and tank set, less seat
- Chrome trip lever
- 12" Uni-Fit® Rough-in (included), less supply

### MODELS

- CST474CEFG  
With CEFIONTECT ceramic glaze
- CST474CEF  
Less CEFIONTECT ceramic glaze (#51 only)

### COMPONENTS

- CT474CUFG Elongated bowl with CEFIONTECT
- CT474CUF Elongated bowl, less CEFIONTECT
- ST454E Tank and cover only
- ST454ER Tank and cover only - right-hand trip lever
- SS224 SoftClose® seat (sold separately)
- SS214 SoftClose® seat (sold separately)
- SS204 SoftClose® seat (sold separately)
- SS114 SoftClose® seat (sold separately)
- SS154 SoftClose® seat (sold separately)
- TSU01W.10R 10" rough-in (sold separately)
- TSU01W.14R 14" rough-in (sold separately)

### COLORS/FINISHES

- #01 Cotton
- #03 Bone
- #11 Colonial White
- #12 Sedona Beige
- #51 Ebony (not available in CEFIONTECT)

### PRODUCT SPECIFICATION

The Two-piece high-efficiency Tornado Flush system toilet shall be 1.28GPF/4.8LPP. Toilet shall have optional CEFIONTECT ceramic glaze and be at Universal Height. Toilet shall have high-profile tank, elongated front bowl and Chrome trip lever. Toilet shall be TOTO Model CST474CEF \_\_\_\_.



 **Tornado Flush**

 **CEFIONTECT**

### CODES/STANDARDS

- Meets or exceeds ASME A112.19.2/CSA B45.1
- Certifications: IAPMO(cUPC), EPA Watersense, State of Massachusetts, City of Los Angeles, and others
- Code compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative Compliance: California AB715, California Green Building Code, City of Los Angeles Water Efficiency Ordinance
- ADA compliant (when installed with trip lever located on the approach side)
- Complies with CA Prop 65 warning requirements



# CST474CEF(G)

## Vespin® II Close Coupled High-Efficiency Toilet, 1.28GPF


### SPECIFICATIONS

- Water Use 1.28 GPF/4.8LPF
- Flush System Tornado Flush™
- Min. Water Pressure 8 psi (flowing)
- Water Surface 6-7/8" x 9-3/4"
- Trap Diameter 2-1/8"
- Rough-in 12" (10" or 14" optional)
- Trap Seal 2-1/8"
- Warranty One Year Limited Warranty
- Material Vitreous china
- Shipping Weight CT474CUF(G) 75lbs.  
ST454E(R) 31.5lbs.
- Shipping Dimensions CT474CUF(G)  
30-1/8" L x 16-3/4" W x 22" H  
  
ST454E(R)  
18" L X 9" W X 16" H


### INSTALLATION NOTES

#### Back-to-Back Toilet Installations:

TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

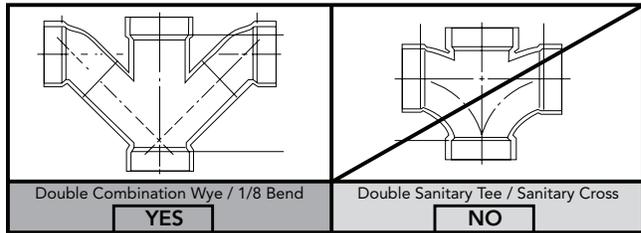

To maintain adequate wall gap between the back of the tank and wall, mount the floor flange at a nominal 12" rough-in distance.

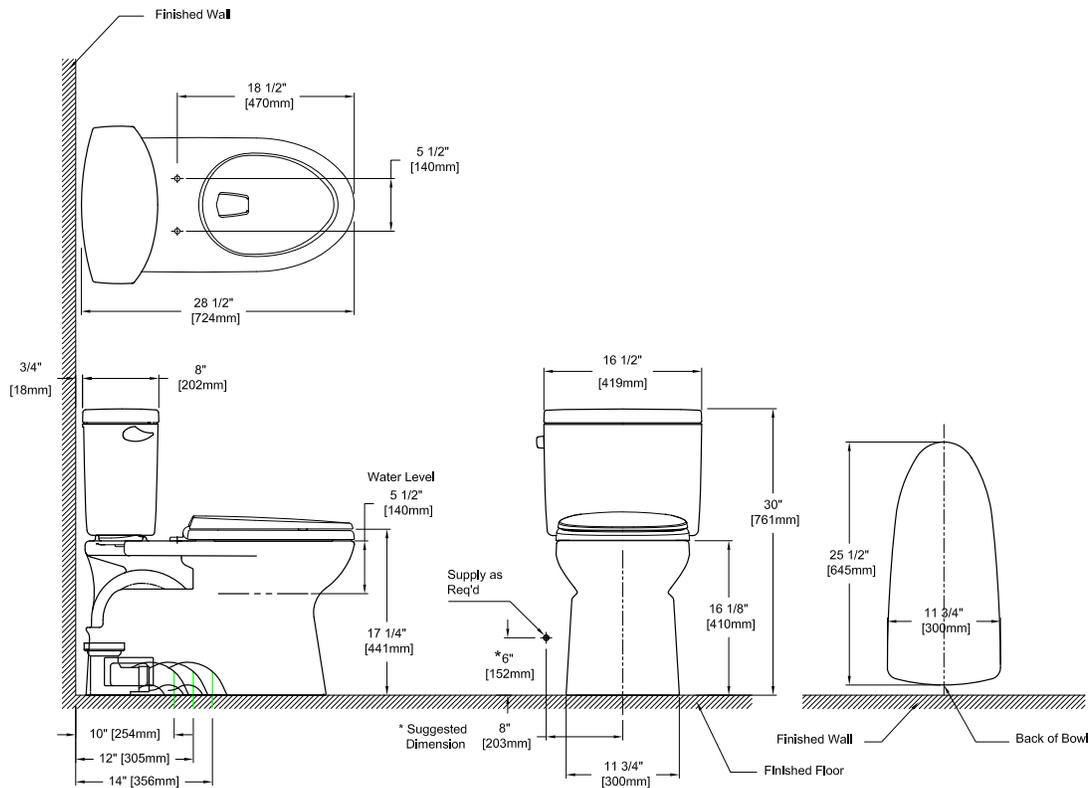

**TOTO**

*These dimensions and specifications are subject to change without notice*