

### Features

- Petite round design.
- No faucet holes; requires wall- or counter-mount faucet.

### Material

- Vitreous china.

### Installation

- Drop-in or under-mount.

### Recommended Accessories

K-9018 P-Trap

### Components

Additional included component/s: Adjustable Linkage, and 1193643 Basin Clamps.



ADA CSA B651 OBC

### Codes/Standards

ASME A112.19.2/CSA B45.1  
ADA  
ICC/ANSI A117.1  
CSA B651  
OBC




### KOHLER® One-Year Limited Warranty



See website for detailed warranty information.

### Available Color/Finishes

*Color tiles intended for reference only.*

Color	Code	Description
-------	------	-------------

	0	White
	96	Biscuit
	47	Almond

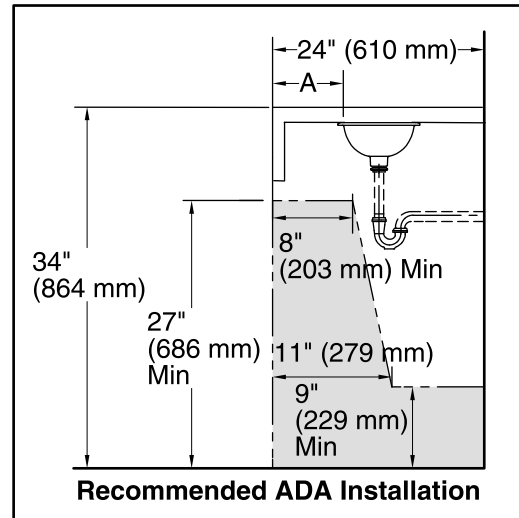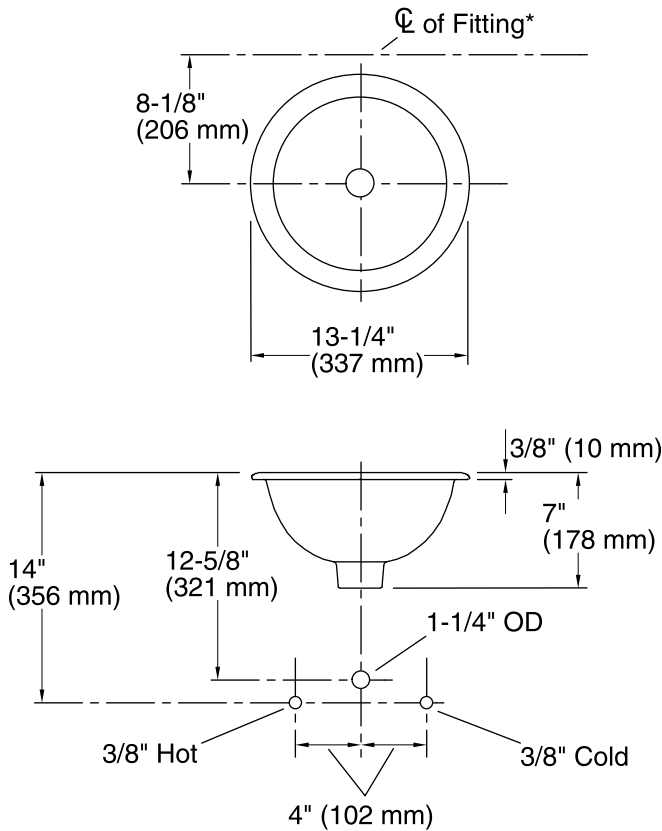

	A
Drop-in	4-3/8" (137 mm)
Under-mount (shown)	4-3/8" (137 mm)

## Technical Information

All product dimensions are nominal.

Installation:	Drop-in, Under-mount
Bowl area:	Diameter: 10-5/8" (270 mm) Water depth: 4-3/4" (121 mm)
Drain hole:	1-3/4" (44 mm)
Template:	116214-7, required, included

## Notes

Install this product according to the installation instructions.

Spout must be a minimum of 4-1/2" (114 mm) long for adequate clearance into bathroom sink. Supplied basin clamp assembly for under-mount installation requires 1" (25 mm) minimum countertop thickness. Installer must supply hardware for thinner countertops.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.