

## two-piece round-front 1.6 gpf toilet K-3977

### Features

- Two-piece design.
- Round-front bowl offers an ideal solution for smaller baths and powder rooms.
- 1.6 gpf (6.0 lpf)
- Left-hand Polished Chrome trip lever.
- Combination consists of the K-4468 tank and the K-4197 bowl.
- Coordinates with other products in the Wellworth collection.

### Technology

- Single-flush gravity uses the force of gravity and a precision-engineered tank, bowl, and trapway to create a strong siphon during flushing.
- KOHLERs canister flush valve harnesses the natural force of gravity and optimizes flushing performance.
- Class Five<sup>®</sup> flushing technology offers virtually plug-free performance and rinsing power for a clean bowl.

### Installation

- Standard 12" (305 mm) rough-in.
- Three-bolt quick-connect installation.
- Seat and supply line sold separately.

### **Recommended Products/Accessories**

K-4639 Cachet® Quiet-Close™ Round-Front Toilet Seat K-5589 Purefresh® Round-Front Toilet Seat K-76923 Puretide™ Quiet-Close™ Round-front manual cleansing toilet seat K-5420 Low-Profile Bolt Caps K-9379 Trip Lever 1023457 Wax Ring/Hardware Kit 1265114 Connector Hose K-23726 Drain treatment K-23724 Toilet cleaner & disinfectant K-23734 Toilet bowl cleaner & disinfectant

### **Included Components**

Product consists of: K-4197 Round-Front Bowl K-4468 Toilet tank, 1.6 gpf Additional Components: Bolt cap accessory pack Tank accessory pack Tank cover Trip lever



### Codes/Standards

ASME A112.19.2/CSA B45.1 DOE - Energy Policy Act 1992

# KOHLER<sup>®</sup> Toilets and Seats Limited Warranty

See website for detailed warranty information.

### **Available Colors/Finishes**

Color tiles intended for reference only.

#### Color Code Description

0	White
96	Biscuit
47	Almond
_	


7 Black Black™



### **Wellworth**®



two-piece round-front 1.6 gpf toilet K-3977

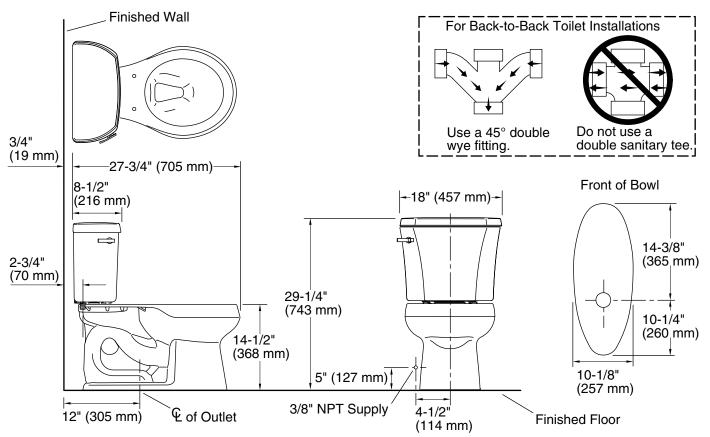

### **Technical Information**

All product dimensions	s are nominal.
Toilet type:	Two-piece, Floor-mount
Waste Outlet:	Floor
Bowl shape:	Round-front
Flush type:	Class Five®
Trap passageway:	2-1/8" (54 mm)
Water Consumption	
Full:	1.6 gpf (6 lpf)
Water surface size:	10-1/2" x 7-3/4" (267 mm x 197 mm)
Rim to water surface:	5-1/4" (133 mm)
Rough-in:	12" (305 mm)
Seat-mounting holes:	5-1/2" (140 mm)

### Notes

Install this product according to the installation instructions.

For back-to-back toilet installations: Use only a  $45^{\circ}$  double wye fitting.

